





PROFACTIVE

PETE

PLASMA  
TREATMENT  
SYSTEM

KEYBOARD

F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12

G G



PIRANI  
PORT

OPEN

CLOSE

VENT VALVE

QUICK

CLOSE

ENABLE

PRESSURE  
CALIBRATION

+ -









FIELD EVALUATED  
To Recognized  
National Standards  
**167268**

## NOTICE



This equipment is manufactured  
under one or more of the  
following patents:

5,672,239	4,984,954
4,867,631	4,790,258
4,780,169	4,720,628
4,585,920	4,585,516
4,579,618	4,464,223



PETALUMA,  
CALIFORNIA  
MADE IN USA

Item : CS900  
S/N : CS11522  
Volt : 200/208 VAC  
Curr : 30 Amps  
Phase: 1  
Freq : 50/60 Hz  
Wires: 2 + Ground  
Mfg : 6/2000




**DANGER**  
**HIGH VOLTAGE**

**DANGER**  
HIGH VOLTAGES  
UP TO 240 VAC

**DANGER**  
HAZARDOUS AREA, TRAINED  
SERVICE PERSONNEL ONLY

POWER REQUIREMENTS  
208VAC 25A 1Ph 50/60 Hz  
(2-Wire + GND)



**NOTICE**


Regal-B  
Model #  
Serial #  
Date of Manufacture  
Date of Inspection


**DANGER**  
RF may be exposed  
if safety interlock  
switches are  
bypassed without  
disabling AC to RF  
generator




30 AMP 2 AMP 2 AMP 30 AMP 10 AMP  
CB1 CB2 CB3 CB4 CBR  
MAIN CONTROL DC RF HEATER



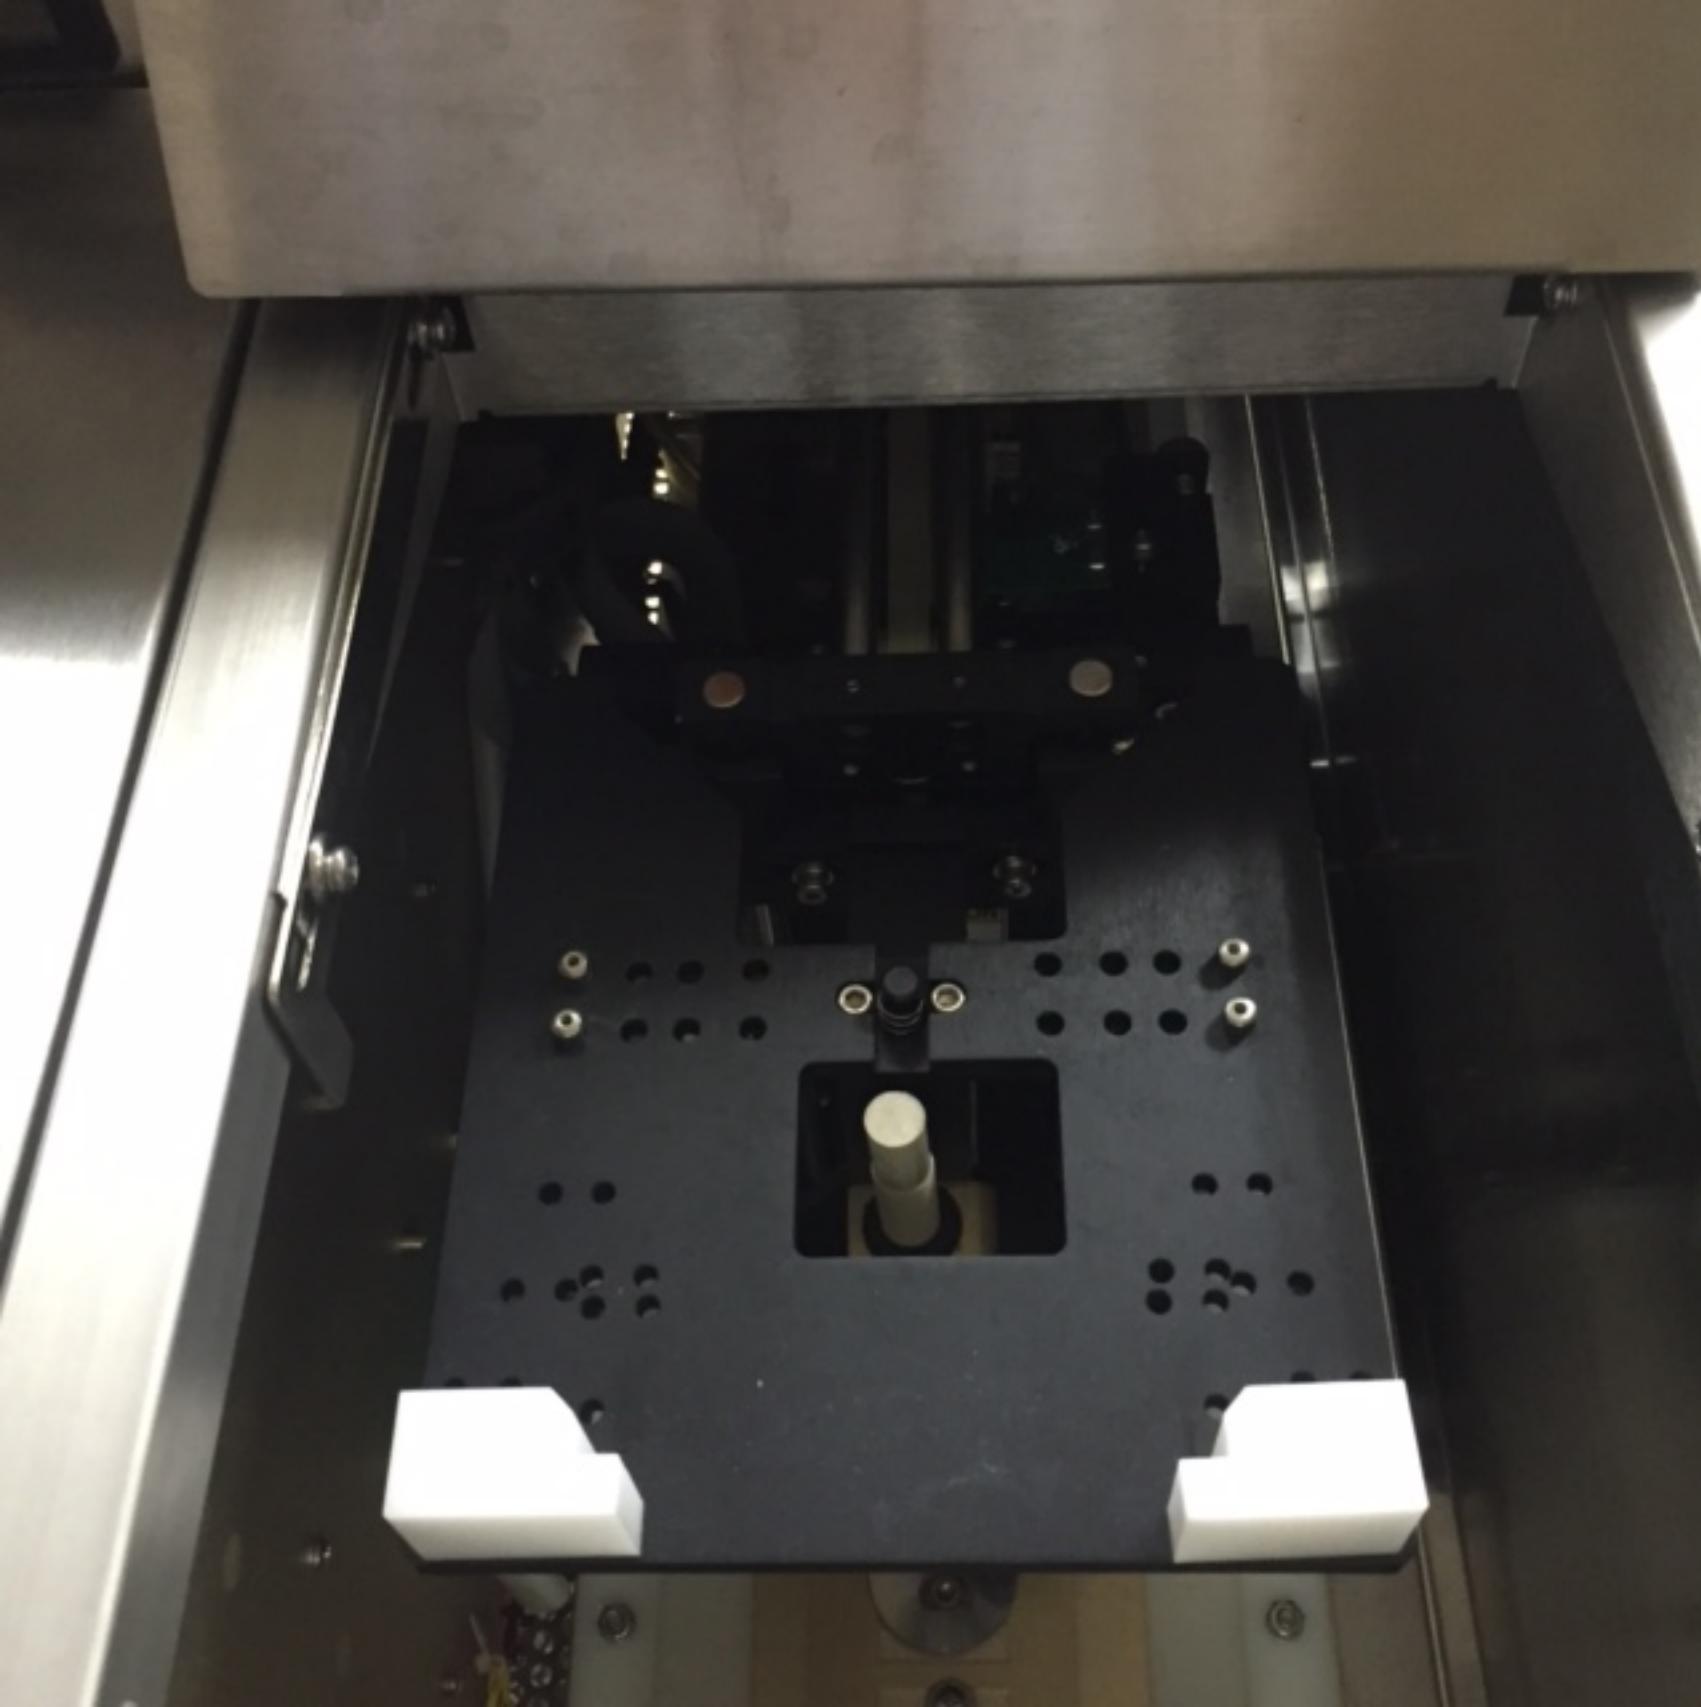

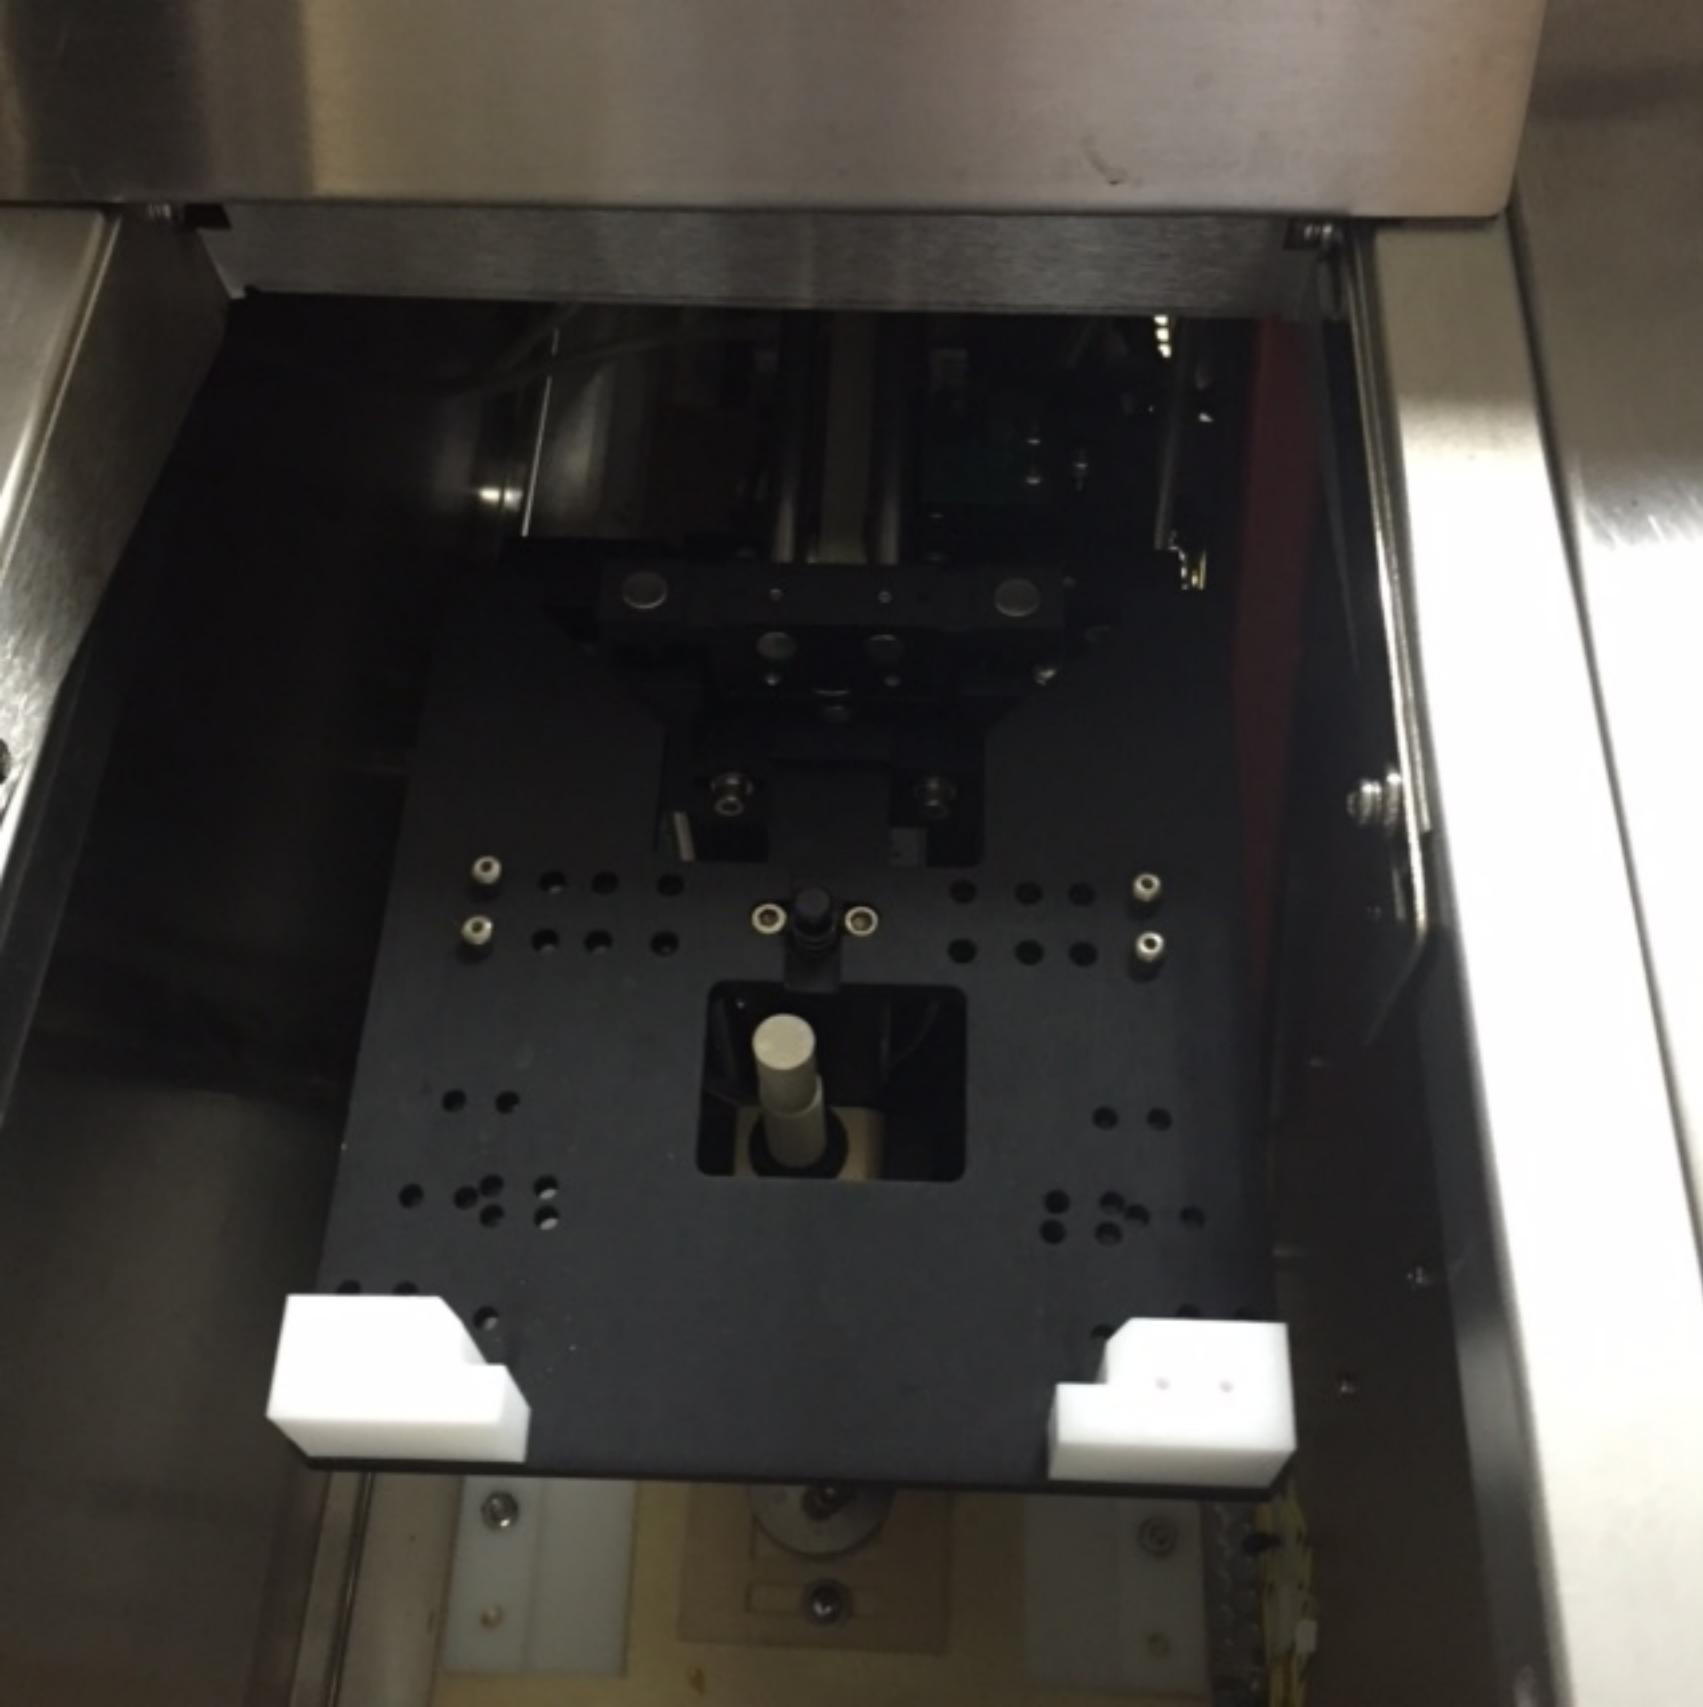

*Operate system  
Turn on exhaust  
reaction chamber  
Wear protective  
handling chamber  
surfaces. Consult  
section of technical  
observe company  
procedure during op-  
and maintenance.*

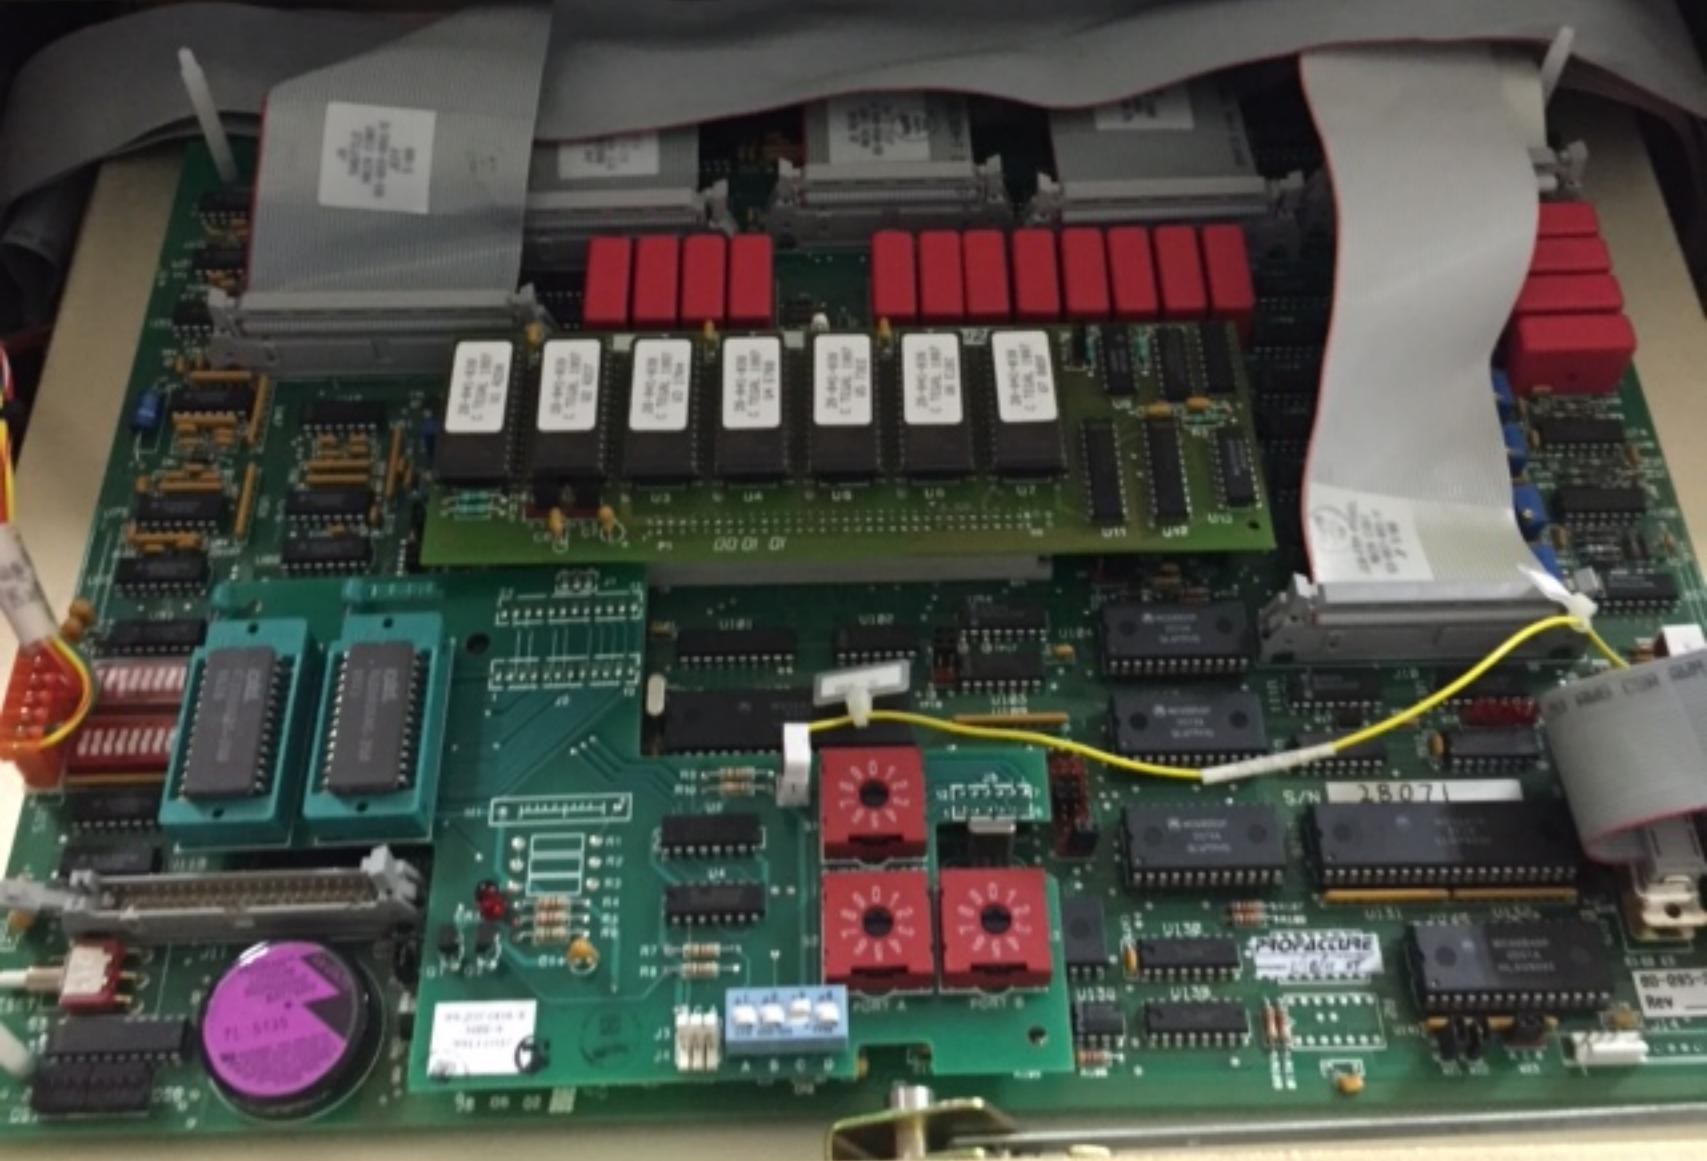

SLOW


DISABLE


RF ON HOURS  
SINCE LAST CLEAN

RESET

PRESSURE  
GAUGE  
OUTPUT

+

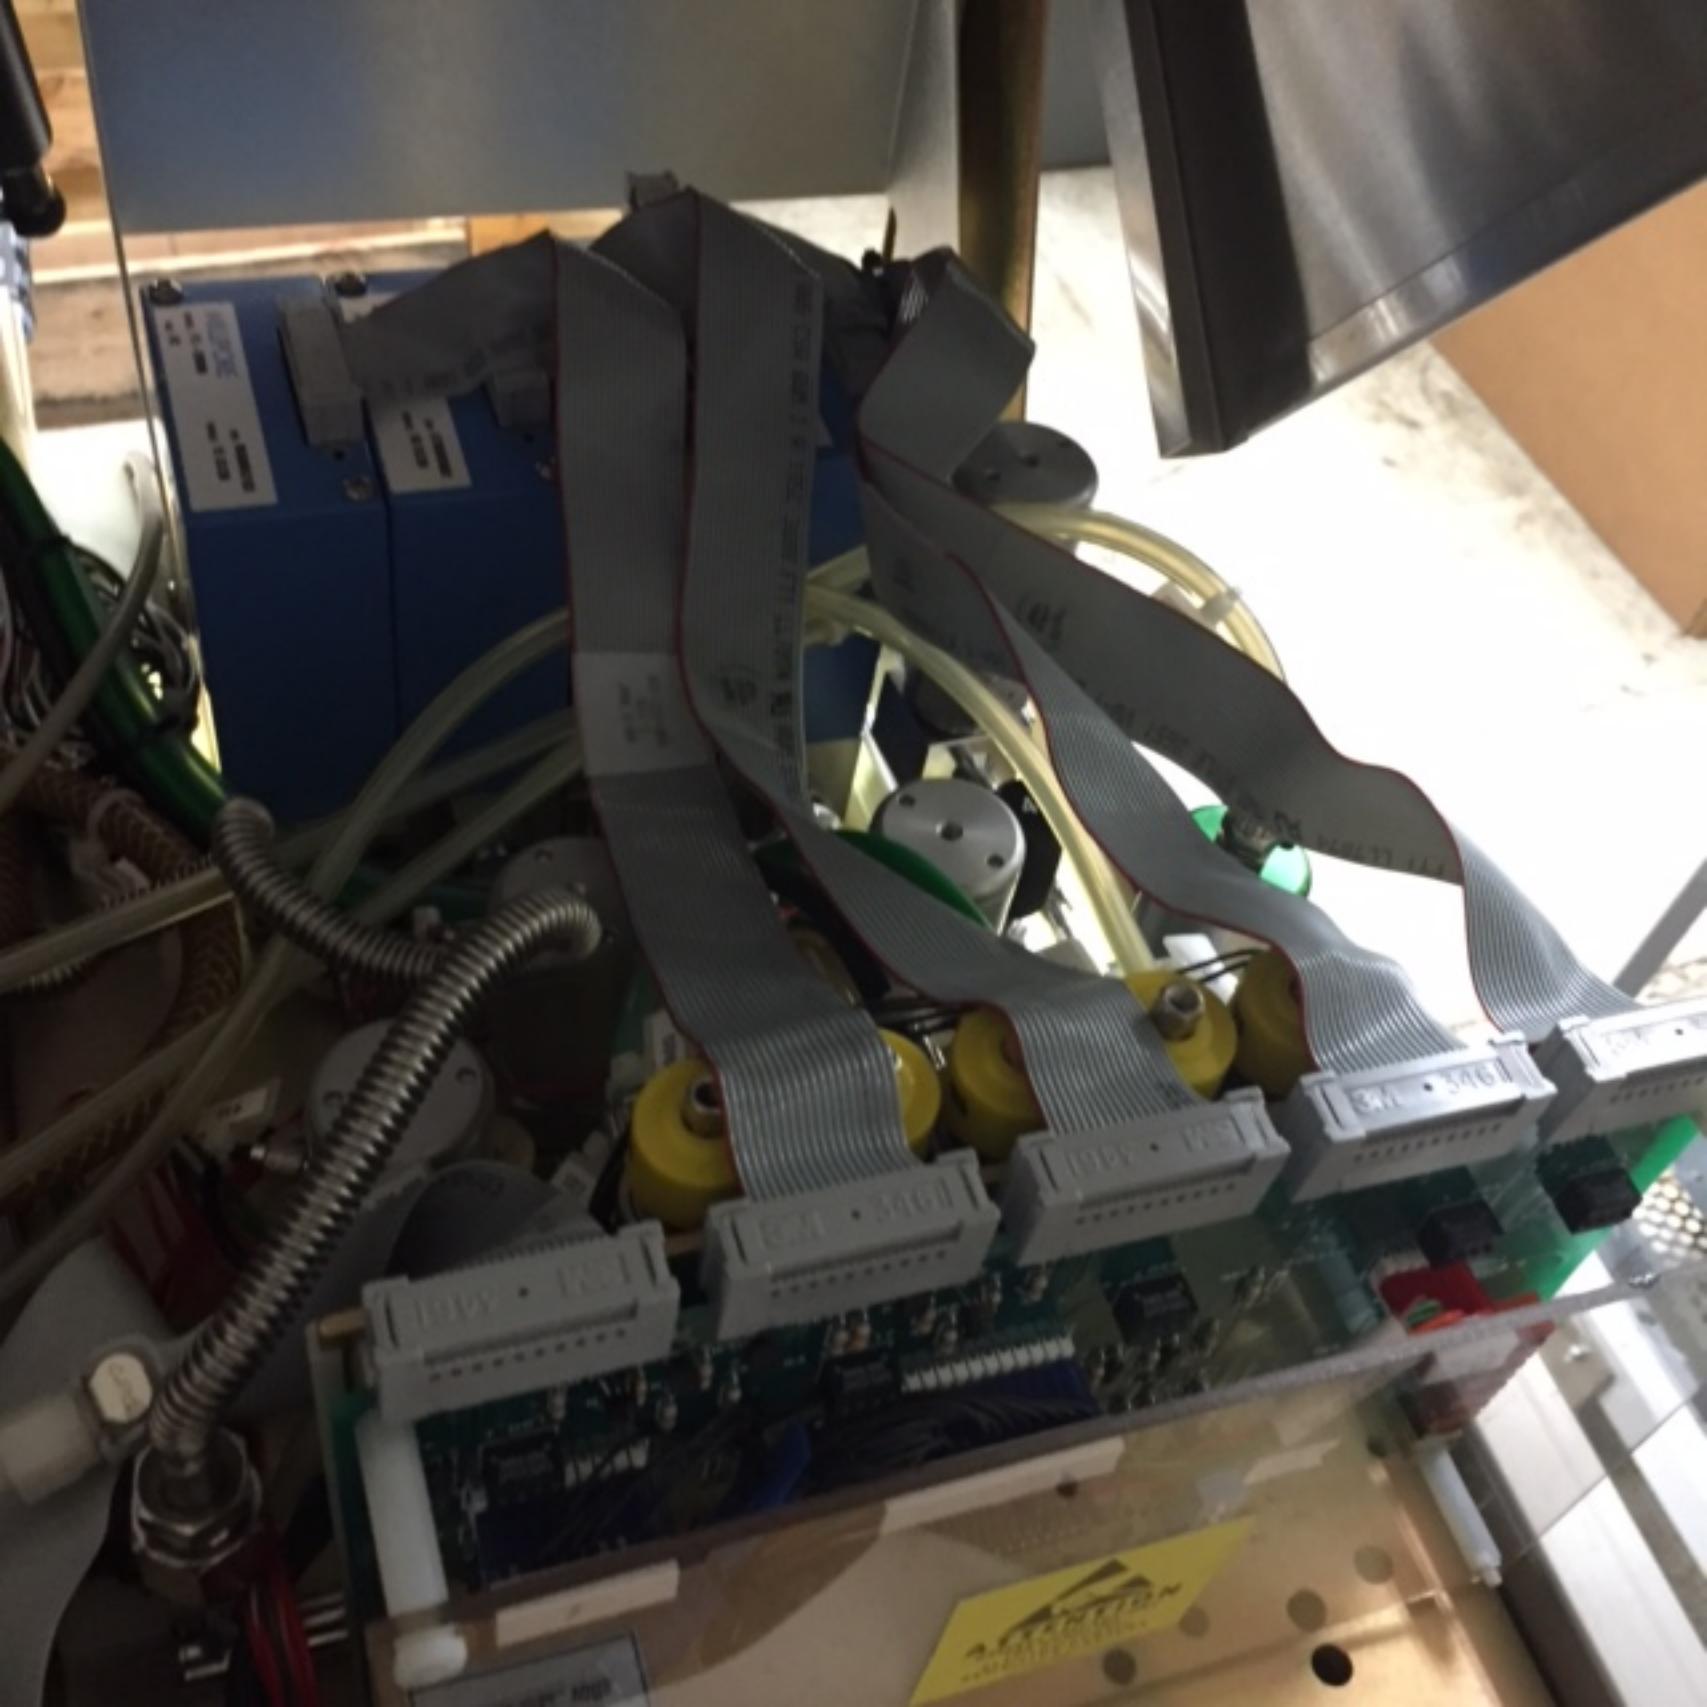

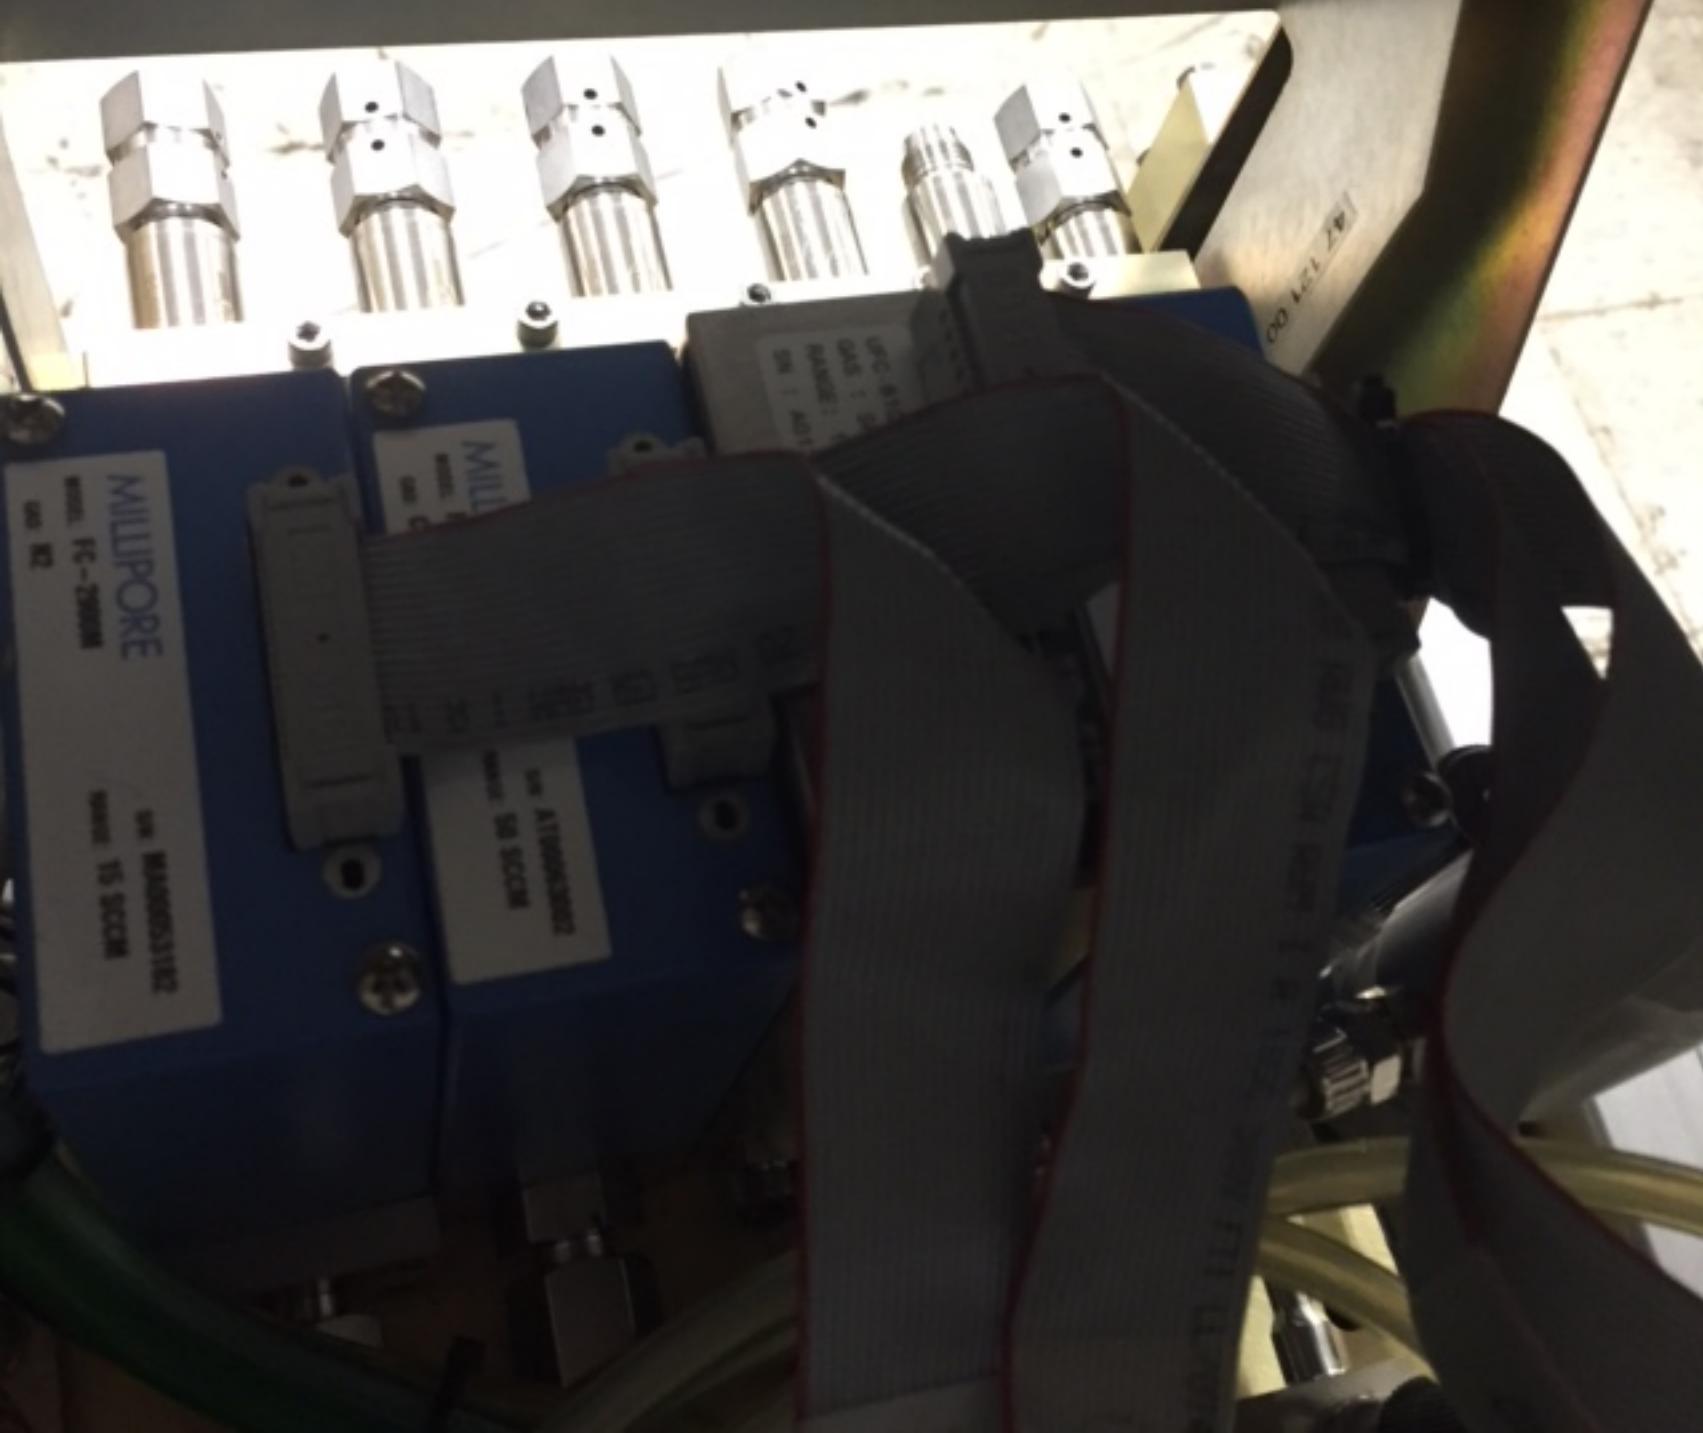

MILLIPORE

WATERS 16-2000

00 R2

WATERS 16-2000

MILLIPORE

WATERS 16-2000

42  
323 001 8

PURGE	GAS 5	GAS 4	GAS 3	GAS 2	GAS 1	
	N <sub>2</sub> 15 PSIG	O <sub>2</sub> 15 PSIG	He 15 PSIG	SF <sub>6</sub> 15 PSIG	CHF <sub>3</sub> 15 PSIG	N <sub>2</sub> 15 PSIG



LIFTING MACHINE BY VACUUM TUBE  
WILL RESULT IN SERIOUS DAMAGE

STAND BY  
 $N_2$  15 PSI

